


WRAP-AROUND BINDING:

You have already trimmed the backing 1 ½" outside of the batting and quilt top. Now fold the backing toward the quilt top just until the raw edge of the backing meets the raw edges of quilt top/batting. Press. Do not miter the corners yet.

Now fold each corner over the quilt top at a 45 degree angle just where the backing meets the corner of the top/batting. Press.

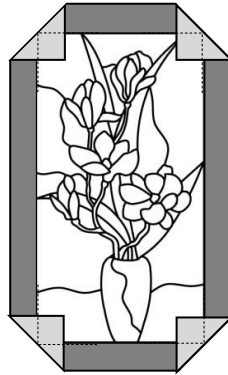

Fold the backing completely over the top on all sides. Press and pin in place. The corners should create a nice miter. Pin the corners carefully for sewing. You will sew over the corner pins carefully before removing them.

Using any stitch desired (straight, zigzag, blanket, serpentine, decorative) stitch the backing in place from the right side (top) of the quilt. The closer you match the thread, the better hidden any mistakes will be! Be brave and use a contrasting thread if your skills are up to it!